

LEDambient Trunk Light



Universal LED trunk light with acceleration and brightness sensor

For higher visibility in everyday situations



Multi-function 2 in 1

Applicable as trunk and torch light



Easy car side fixation via magnet and additional mounting plate

Strong magnet for a quick attachment



2 years OSRAM guarantee¹⁾1)For precise conditions refer to:

www.osram.com/am-guarantee

Powerful performance and exceptionally long service life

Ficha técnica do produto



Iluminação de interiores de veículos com precisão

Introducing the universal LEDambient Trunk Light, the perfect companion for your car's storage space. Packed with advanced features and designed to enhance your convenience, this versatile light will transform the way you use the trunk. Featuring an acceleration and brightness sensor, the trunk light boasts an automatic light function that activates as soon as you open the car trunk. Our light illuminates your trunk instantly, making it effortless to find what you need. With both automatic and manual functionality, you have complete control over the lighting. With a color temperature of up to 6,000K, the trunk light provides a bright and clear illumination, allowing you to see every detail in your trunk. Very practical: With its 2 in 1 multifunction, the light can be used as an inspection lamp and as a torch light. In addition, equipped with a rechargeable 1500mAh battery, the trunk light offers long-lasting performance. The included USB-C cable allows for convenient charging, ensuring you're always prepared. Thanks to the easy car side fixation via the magnet and additional mounting plate, an easy installation is included. Simply attach the light to your car's interior using the strong magnet or the included mounting plate, and you're ready to go. The powerful magnet ensures a secure attachment, so you never have to worry about the light falling or moving while you're on the road. Trust in the quality and durability of the universal LED trunk light - OSRAM provides a 2-year guarantee¹⁾. 1) For precise conditions refer to: www.osram.com/am-guarantee

Ficha técnica do produto

Dados técnicos

Informação de Produto

Referência do pedido	LEDINT106
----------------------	-----------


Dados Elétricos

Potência nominal	3000 W
Tensão nominal	37 V

Dados fotométricos

Temperatura de cor	6000 K
Fluxo luminoso	40 lm

Dimensões e peso

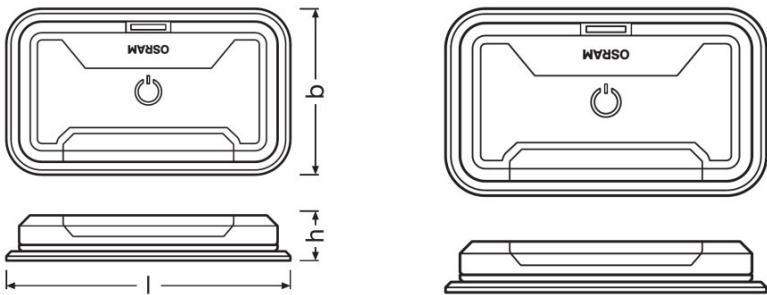

Peso do produto	10000 g
Comprimento	1080 mm
Largura	175 mm
Altura	630 mm

Espectativa de Vida

Vida estimada Tc	1000 h
Garantia	2 anos

Normas e Certificações

Standards	CE
-----------	----

Categoria específica para o país

Referência do pedido	LEDINT106
----------------------	-----------

Ficha técnica do produto

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	07-03-2024
Primary Article Identifier	4062172240062
Candidate List Substance 1	No declarable substances contained
Declaration No. in SCIP database	No declarable substances contained

Dados de Logística

Código do produto	Descrição do produto	Embalagem unitária (peças/unidade)	Dimensões (comprimento x largura x altura)	Volume	Peso bruto
4062172240062	LEDambient Trunk Light		65 mm x 19 mm x 137 mm	0.17 dm ³	141.00 g
4062172240079	LEDambient Trunk Light		235 mm x 114 mm x 107 mm	2.87 dm ³	1600.00 g

O código do produto mencionado indica a quantidade mínima a ser adquirida. Uma caixa unitária pode conter um ou mais produtos. Quando for colocar o pedido de compras, indique uma quantidade unitária ou múltiplos da caixa unitária.

Download Data

Arquivo	
	User instruction LEDambient TRUNK LIGHT
	Filme de aplicação LEDambient Trunk Light LEDINT106 Produkt Video DE
	Filme de aplicação LEDambient Trunk Light LEDINT106 Product Video IT

Instruções de segurança

Para obter informações detalhadas sobre a aplicação, consulte a ficha de dados do produto e o manual do usuário

Informações sobre aplicações

Para obter mais informações sobre aplicações e gráficos acesse a ficha técnica do produto.

Retratação

Sujeito a alteração sem prévio aviso. Sempre utilize a versão mais recente.

